

# Reliance R6032CR

60" x 32" x 19.5"

**Installation:** Drop-in or Undermount

Must specify on order.

#### **GENERAL SPECIFICATIONS:**

Material Acrylic
Plumbed Weight 90 lbs / 41 kg
Soaker Weight 65 lbs / 30 kg


**Average Fill** 40 gal to above jet level **Maximum Fill** 62 gal to overflow

NOTE: Filling this tub to the maximum may require an above average size or dedicated water heater.


#### **ELECTRICAL SPECIFICATIONS:**

Required Electrical Service 110 Volt
Air Bath or Whirlpool 1-15 amp GFCI
Whirlpool with Inline Heater 1-15 amp GFCI
Soaker with Inline Heater 2-15 amp GFCI
Air Bath with Inline Heater 2-15 amp GFCI

CSA Certified C/US; ANSI Z124.1 for plastic tubs and ANSI 112.19.7 for whirlpool  $\dot{}$ 

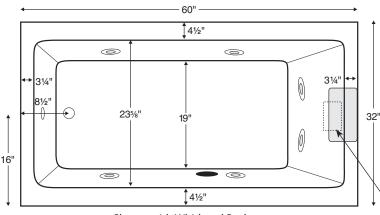

Shown with Whirlpool Package.



## PACKAGES AND OPTIONS

Hydrotherapy Package	Package Contents	Part #
Soaker	soaking bath - no jets; textured bottom	R6032CRS
Whirlpool	6 point-massage jets, 1-bhp pump	R6032CRW
Air Bath	12 air jets, heated air blower, pre-leveled foam base (increases overall height 2-3")	R6032CRA

#### **OPTIONS**

Standard Colors - White Color Upgrade - Biscuit (RCOLOR)

**Quick Ship -** reduces lead time - call for availability Soaker or Whirlpool - ships within 48 hrours (RQSHIP)

Air Bath - ships within 72 hours (RQSHIPA)

Inline Heater - Whirlpool (RHTI)

Inline Heater with Pump - Soaker or Air Bath (RHTISOAK)

#### Lift & Turn Drain Kit -

Compliance Label

Model MTXXXX

Made in USA

Complies with

ANSI Z124.1-1995 CSA Certified C/US

Chrome (RWOC); Brushed Nickel (RWOBN), White (RWOW)

#### Tile Flange -

Field-Installed (RTFKNI)

Kit includes ABS material and adhesive for 3 sides of coverage

### IMPORTANT INFORMATION

- Before ordering or installing, please consider future access to equipment.
- Add bedding compound to fully level and support bottom of tub.
- Tubs equipped with an air bath or a pre-leveled foam base are designed to rest on the floor without bedding compound, provided the floor is level.
- Overall tub height is increased by approx. 2-3" when tub is equipped with any air bath package or when pre-leveled foam base or framing system is ordered.
- Please measure tub on-site before building tub decking.
- . Jet, pump & blower locations are predetermined and cannot be changed.
- . Suction and control locations may vary.
- . Specifications and configurations are subject to change without notice.
- . Measurements are  $\pm 1/2$ " and are subject to change without notice.
- Measurements herein supersede all others published prior to publication date shown below.