Reliance **R60600C**

59.25" x 59.25" x 21.25"

Installation: Drop-in

cannot be undermounted


GENERAL SPECIFICATIONS:

Material	Acrylic	
Plumbed Weight	125 lbs / 57 kg	
Soaker Weight	100 lbs / 45 kg	
Average Fill	44 gal to above	
Maximum Fill	85 gal to overfl	
NOTE: Filling this tub to the	maximum may require a	

5 kg bove jet level verflow uire an above averaae size or dedicated water heater

ELECTRICAL SPECIFICATIONS:

Required Electrical Service	110 Volt	
Air Bath or Whirlpool	1-15 amp GFCI	
Whirlpool with Inline Heater	1-15 amp GFCI	
Soaker with Inline Heater	1-15 amp GFCI	
Air Bath with Inline Heater	2-15 amp GFCI	
CSA Certified C/US; ANSI Z124.1 for plastic tubs and ANSI 112.19.7 for whirlpool components.		

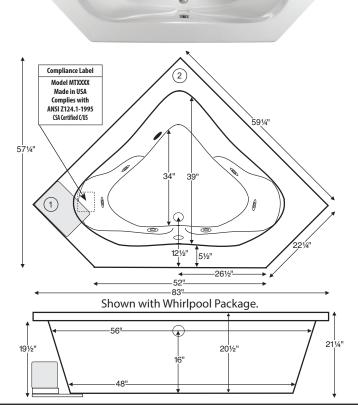

PACKAGES AND OPTIONS

Hydrotherapy Package	Package Contents	Part #
Soaker	soaking bath - no jets; textured bottom	R6060OCS
Whirlpool	6 point-massage jets, 1-bhp pump	R6060OCW
Air Bath	12 air jets, heated air blower, pre-leveled foam base (increases overall height 2-3")	R6060OCA

OPTIONS

Standard Colors - White

Color Upgrade - Biscuit (RCOLOR)

Quick Ship - reduces lead time - call for availability Soaker or Whirlpool - ships within 48 hrours (RQSHIP) Air Bath - ships within 72 hours (RQSHIPA) Inline Heater - Whirlpool (RHTI) Inline Heater with Pump - Soaker or Air Bath (RHTISOAK)

Lift & Turn Drain Kit -

Chrome (RWOC); Brushed Nickel (RWOBN), White (RWOW)

Tile Flange -

Field-Installed (RTFKNI)

Kit includes ABS material and adhesive for 3 sides of coverage

IMPORTANT INFORMATION

- Before ordering or installing, please consider future access to . equipment.
- Add bedding compound to fully level and support bottom of tub.
- Tubs equipped with an air bath or a pre-leveled foam base are designed to rest on the floor without bedding compound, provided the floor is level.
- Overall tub height is increased by approx. 2-3" when tub is equipped with any air bath package or when pre-leveled foam base or framing system is ordered.
- Please measure tub on-site before building tub decking. •
 - Jet, pump & blower locations are predetermined and cannot be changed. .
 - Suction and control locations may vary. .
 - Specifications and configurations are subject to change without notice. .
 - Measurements are $\pm 1/2$ " and are subject to change without notice.
 - Measurements herein supersede all others published prior to publication date shown below.