


CONSTRUCTION AND STANDARD FEATURES

- Single, front threshold; 3.5" drain opening pre-drilled.
- Integral tile flange on 3 sides to facilitate installation.
- Textured bottom that meets ASTM F-462-1994 certification requirements for safer showering.
- Durable Lucite® cast acrylic shell is extremely scratch- and stain-resistant, yet renewable because the color goes all the way through the material.
- Non-porous surface makes cleaning and sanitizing faster and more effective.
- Multi-layered backing of fiberglass / resin / titanium & recycled acrylic parts.
- 1-year Limited Residential and Commercial Warranty.
- Includes a PVC drain kit in chrome finish. Also available in brushed nickel.
- Lead Time - 3-5 business days. Optional "Quick Ship / Priority" reduces lead time to 2 business days.

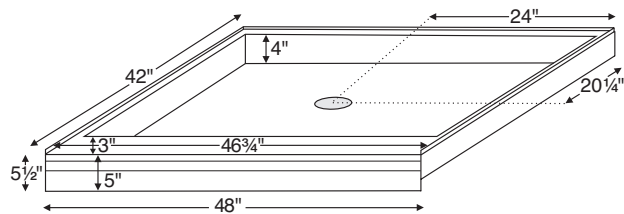


Part # R4842CD Size: 48" x 42" x 5"

Available Colors - White or Biscuit

Options - Quick Ship / Priority. *Call for availability.*

PVC Drain - Chrome (included); Brushed Nickel (upcharge)

Shipping Weight: 55 lbs.

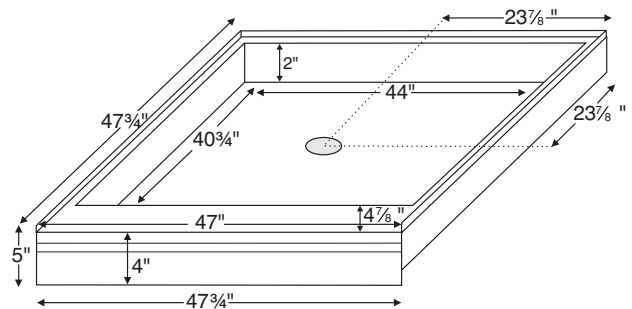


Part # R4848CD Size: 47.75" x 47.75" x 4"

Available Colors - White or Biscuit

Options - Quick Ship / Priority. *Call for availability.*

PVC Drain - Chrome (included); Brushed Nickel (upcharge)

Shipping Weight: 65 lbs.

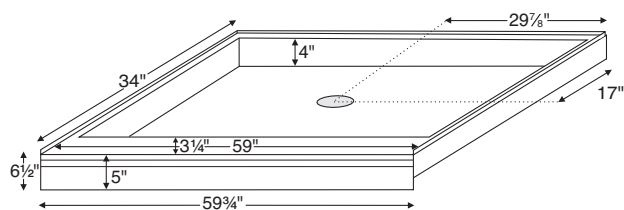


Part # R6034CD Size: 59.75" x 34" x 6.5"

Available Colors - White or Biscuit

Options - Quick Ship / Priority. *Call for availability.*

PVC Drain - Chrome (included); Brushed Nickel (upcharge)

Shipping Weight: 130 lbs.

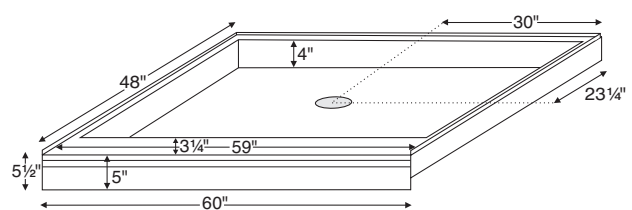

Part # R6048CD Size: 60" x 48" x 5"

Available Colors - White or Biscuit

Options - Quick Ship / Priority. *Call for availability.*

PVC Drain - Chrome (included); Brushed Nickel (upcharge)

Shipping Weight: 130 lbs.

IMPORTANT INSTALLATION INFORMATION: The shower base MUST be set using Quickrete® #1103 Sand/Topping Mix or equivalent. Failure to properly bed will VOID the warranty. Materials such as plaster, sheetrock mud or plain sand are unacceptable and will void the warranty. Water test base for proper drainage prior to installing surrounding materials. Please see instructions included with shower base for full installation guidelines.