



Features integral front skirting & integral tile flange on 3 sides.

Reliance® Tubs

R6030CAIS

59.5" x 30" x 19"

GENERAL SPECIFICATIONS:

Installation: Alcove

Material: Acrylic


Plumbed Weight: 105 lbs / 48 kg

Soaker Weight: 85 lbs / 39 kg

Average Fill: 32 gal to above jet level


Maximum Fill: 39 gal to overflow

NOTE: Filling this tub to the maximum may require an above average size or dedicated water heater.

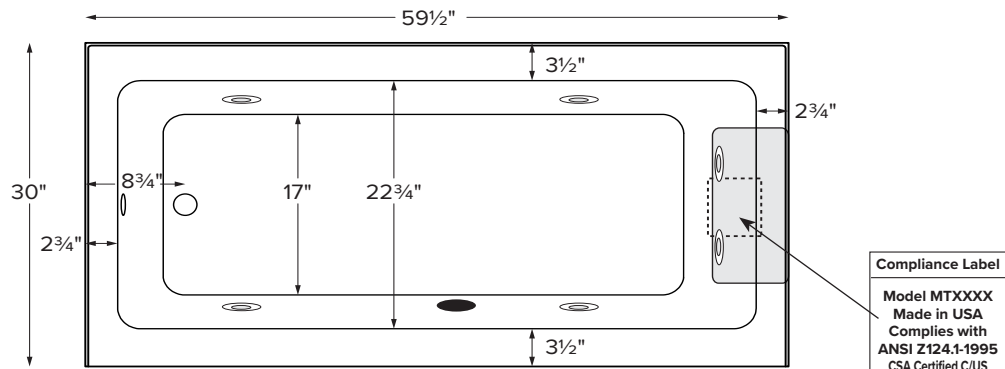

Shown with Whirlpool Package

Tile flange height = 1/2"

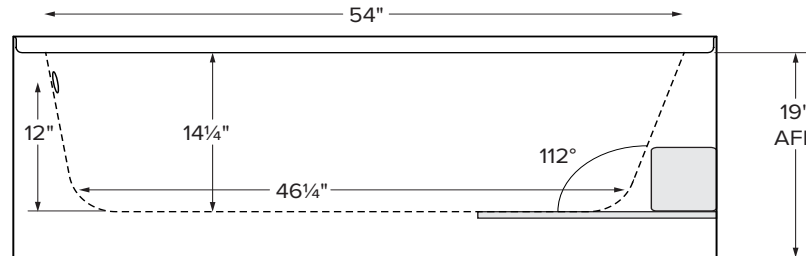

This tub model features a 19" skirt height that allows for above floor rough-in.

Front access panel is not available.

ELECTRICAL SPECIFICATIONS

Required Electrical Service - 110 Volt

Air Bath or Whirlpool - 1-15 amp GFCI

Soaker - Inline Heater - 1-15 amp GFCI

Air Bath with Inline Heater - 2-15 amp GFCI

Whirlpool with Inline Heater - 1-15 amp GFCI

CSA Certified C/US; ANSI Z124.1

CSA Certified C/US; ANSI 112.19.7

IMPORTANT ORDERING & INSTALLATION INFORMATION:

- Before ordering or installing, please consider future access to all equipment.
- Please measure tub on-site before building tub decking.
- Add bedding compound to fully level and support bottom of tub.
- Tubs equipped with an air bath or a pre-leveled foam base are designed to rest on the floor without bedding compound, provided the floor is level.
- Overall tub height is increased by approx. 2-3" when tub is equipped with any air bath package.
- Jet, pump & blower locations are predetermined and cannot be changed.
- Suction and control locations may vary.
- Specifications and configurations are subject to change without notice.
- Measurements are +1/2" and are subject to change without notice.
- Measurements herein supersede all others published prior to publication date shown below.

PACKAGE	PACKAGE CONTENTS	PART #
Soaker	Soaking bath - No jets. Includes integral front skirting, 3-sided integral tile flange, and textured bottom.	R6030CAISS
Air Bath	12 air jets, heated air blower, integral front skirting, 3-sided integral tile flange, textured bottom, and pre-leveled foam base.	R6030CAISA
Whirlpool	6 point-massage jets, 1-bhp pump, integral front skirting, 3-sided integral tile flange, and textured bottom.	R6030CAISW

Lead Time - Soakers and Whirlpool Packages - 5 business days
Air Bath Packages - 7 business days

<p>COLOR AND FINISH OPTIONS NOTE: Part codes for all options listed in parenthesis.</p> <p>Color Upgrade: Biscuit (RCOLOR)</p>
<p>STANDARD OPTIONS NOTE: Part codes for all options listed in parenthesis.</p> <p>Quick Ship / Priority Soaker & Whirlpool (RQSHIP) Airbath (RQSHIPA)</p>
<p>Inline Heater For Whirlpool (RHTI) Heater with Recirculating Pump for Soaker & Air Bath (RHTISOAK)</p>
<p>Lift and Turn Drain & Overflow Chrome (RWOC) Brushed Nickel RWOBN) White (RWOW)</p>
<p>Pre-Leveled Foam Base 5' Tubs (RPLFOAM) 5.5' & 6' Tubs (RPLFOAM2)</p>



Front view of the integral skirt.