


KINGSTON BRASS

THE TRADITION OF FINE BRASS

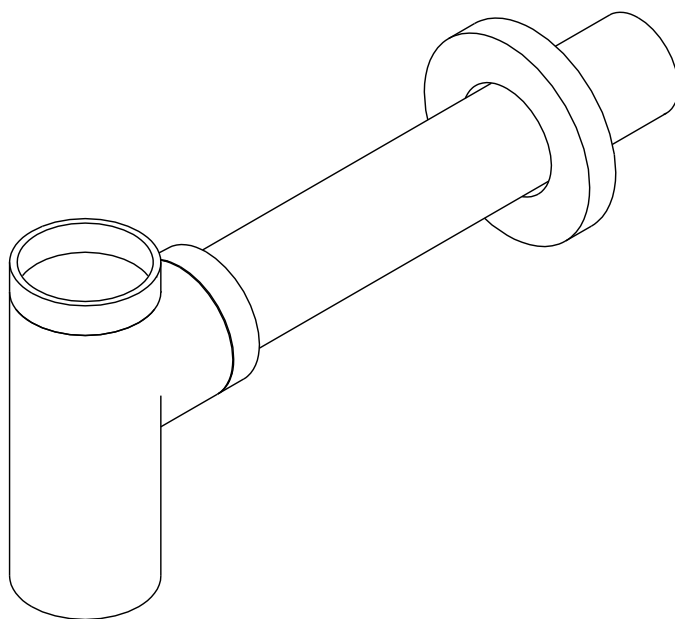

www.kingstonbrass.com

TOLL-FREE CUSTOMER SERVICE: 877-2-KBRASS


TECHNICAL SUPPORT E-mail: service@kingstonbrass.com

6240 Prescott Court, Chino, CA91710

KINGSTON BRASS

THE TRADITION OF FINE BRASS


INSTALLATION INSTRUCTIONS FOR DD8101 DECO BOTTLE TRAP



Pipe Wrench



Teflon's Tape



Silicone Sealant

1. Remove Horizontal Leg and slip joint from bottle trap
2. Apply Teflon to all exposed threads
3. Insert Black Rubber washer, Slip Joint and Waste cover onto Horizontal Leg
4. Insert Horizontal Leg into wall waste opening, do not tighten
5. Insert Black Rubber Washer and Slip Joint onto Tailpiece
6. Align Bottle Trap with Horizontal Leg and Tailpiece, at this point it may be necessary to cut part of Tailpiece or part of Horizontal Leg to obtain proper alignment
7. After all components have been properly aligned, insert Horizontal Leg and Tailpiece into Bottle Trap.
8. Thread Both Slip Joint Nuts onto Bottle trap and tighten along with slip joint securing horizontal leg to wall waste opening.
9. Check for Leakage by opening Faucet and letting water run for at least 45 seconds

